
Above Ground Stormwater Retention and Detention Tanks







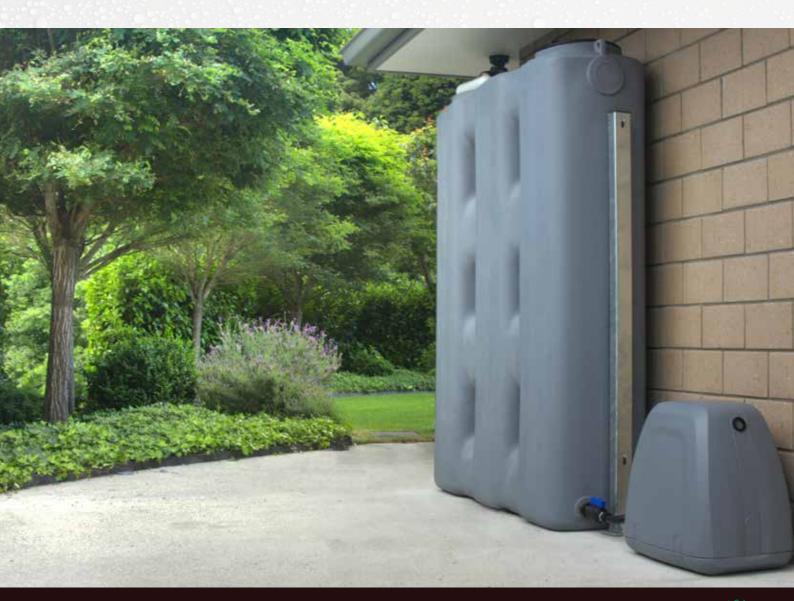

30 YEARS OF PROVEN TANK MANUFACTURING

Devan Plastics has been the business of making tanks for over 30 years. If there is anything that time has taught us it is that our customers do not compromise when it comes to quality.


DESIGNED FOR EASY SPECIFICATION

Devan's range of stormPANEL tanks are designed to AS/NZS4766 by independent engineers with generic seismic and wind restraint systems for New Zealand's most trying areas - PS1 Documents for restraints are available with all stormPANEL tanks for seismic zone 1, 2 & 3 and very high wind zone.


DESIGNED TO BE SUSTAINABLE

Devan stormPANEL tanks are manufactured from the highest quality polyethylene available which is ideally suited to our moulding technique, giving long life and trouble-free service. The material is certified to AS/NZS4766:2006, AS/ NZS4020:2005, and AS/NZS 2070 so are suitable for potable water.

Polyethylene cannot rot or corrode and is UV stabilised for New Zealand's harsh environmental conditions. The manufacturing process produces zero waste of polyethylene and the product is 100% recyclable. At the end of its useful life it can be returned to us to be recycled into other long lasting products.







Side view 2,000L



End view

Code	Product	Height	Width	Depth	Weight
SPT1	1,000L	1,950mm	1,520mm	460mm	60 kg
SPT2	2,000L	1,950mm	3,130mm	460mm	120 kg
SPAKRP	Restraint pole kit - post type	2250mm	75mm	50mm	30 kg
SPAKCP	Restraint pole kit - Pad type	1660	75mm	50mm	25 kg
SPAKRW	Wall bracket restraint kit	-			2 kg
SPAB50	50mm Multi-tank Connection Kit - stormPANEL	- 0	-		



Please note that the colours represented above are the best match possible within screen and printing variations. Colorsteel colours are a guide only not colour matches



FEATURES AND BENEFITS OF STORMPANEL

When space is tight stormPANEL tanks are ideal for existing and new homes. The tanks are designed to not be seen and the ease of handling was part of the design process from the start.



DESIGNED TO BE EASY

Devan's range of stormPANEL tanks have been designed with moulded in lifting lugs for certified shackles.

Simple end panels allow for easy connection of 100mm, 90mm and 80mm stormwater pipe with the use of Wallace seals (sold separately).

A 300mm lid is fitted for ease of inspection and cleaning



Devan's range of stormPANEL tanks can be partially buried up to 200mm to reduce the over all height to 1750mm



ULTRA THIN - ONLY 460MM DEEP!

Devan's range of stormPANEL tanks have been designed to take up as little space as possible.

The 1.000L and 2.000L models have been designed to connect together to increase volume



UNIQUE MOUNTING SYSTEM

1,000L screened

Devan's range of stormPANEL tanks have been designed with threaded M5 mounting points on one side to allow the fitting of custom art work, wooden trellis or other screening (not supplied with tank) - note that the attachments must be supported at ground level.

LARGE BRASS OUTLETS

Devan's range of stormPANEL tanks have been designed with our famous brass 50mm BSP outlets, 1 at each end. When using or joining multiple tanks the larger outlet assists with balancing.

Extra 25mm outlets for orifice overflow points or garden taps are simple to install with our easy plumb fittings (sold separately)

